

SHP320-35

Semi-Solid-State

NMC⁺




Capacity / Voltages

Typical	35.00 Ah	Voltages	Nominal	3.65 V
	127.75 Wh		Maximal	4.20 V
			Minimal	2.75 V

Characteristics

Discharging	Ultrafast	5 C	Charging	Ultrafast	2 C
	Fast	3 C		Fast	1 C
	Standard	0.33 C		Standard	0.33 C
Temperatures	Discharge	-20-55°C	Charge	0-45°C	
Energy Density	Gravimetric	311 Wh/kg	Volumetric	713 Wh/l	

Dimensions

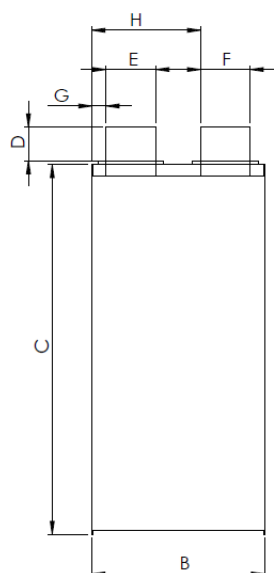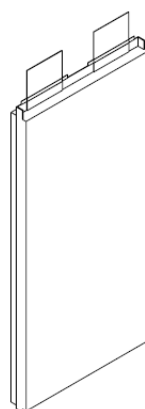

A	Thickness	11 ± 0.3 mm
B	Width	87 ± 1 mm
C	Length	187 ± 2 mm
D	Tab length	18 ± 4mm
E	Tab width	25 ± 0.5mm
F	Tab width	25 ± 0.5mm
G	Tab margin	7.2 ± 2mm
H	Tab margin	56 ± 2 mm
I	Tab thickness +	0.3 ± 0.05 mm
I	Tab thickness -	0.2 ± 0.05mm
	Weight	410 ± 15g

The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice. General tolerance according to ISO 2768-m-K. For more information and detailed specifications, please request the extended datasheet.



WELION Energy Europe

Contact Felix Greuel | mail: info@welion-energy.com | phone: +4915115521969

About us www.welion-energy.com