

SHP270-31-ESS

Semi-Solid-State



Capacity / Voltages

Typical	31 Ah	Voltages	Nominal	3.6 V
	111.6 Wh		Maximal	4.2 V
			Minimal	2.5 V


Characteristics

Discharging	Fast	1 C	Charging	Fast	1 C
	Standard	0.33 C		Standard	0.33 C

Temperatures	Discharge	-20 - 60°C	Charge	0-55°C
---------------------	-----------	------------	--------	--------

Energy Density	Gravimetric	266 Wh/kg	Volumetric	635 Wh/l
-----------------------	-------------	-----------	------------	----------

Dimensions

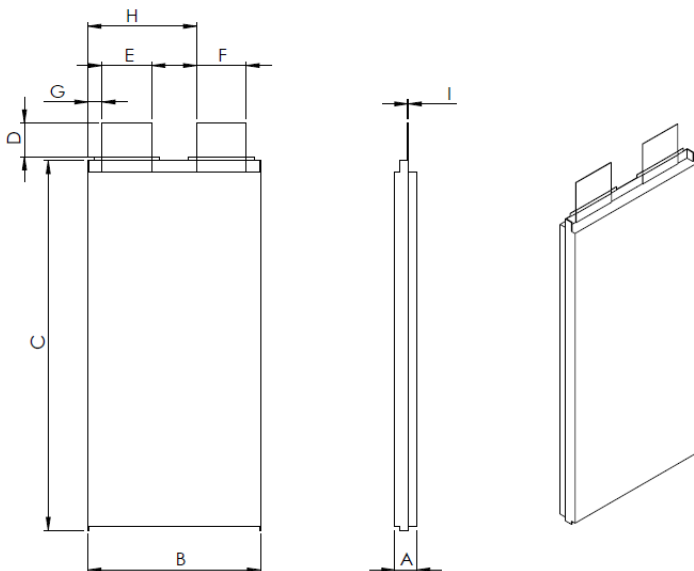

A	Thickness	10.8 ± 0.3 mm
B	Width	87 ± 1 mm
C	Length	187 ± 2 mm
D	Tab length	17 ± 3mm
E	Tab width	25 ± 0.5mm
F	Tab width	25 ± 0.5mm
G	Tab margin +	7 ± 2mm
H	Tab margin -	56 ± 2 mm
I	Tab thickness +	0.3 ± 0.05 mm
I	Tab thickness -	0.2 ± 0.05mm
	Weight	418 ± 15g

The information contained herein is for reference only and does not imply a performance guarantee or a product warranty. Specifications and characteristics are subject to change without prior notice. General tolerance according to ISO 2768-m-K. For more information and detailed specifications, please request the extended datasheet.

